


**E30396**

USB IO-LINK INTERFACE

Parameter setting systems

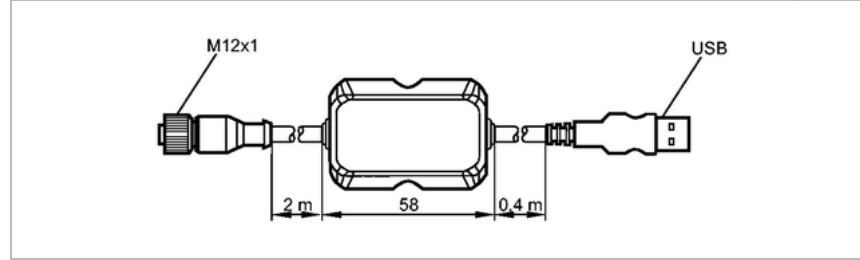


<b>Product characteristics</b>	
IO-Link interface	
for parameter setting and analysis of units with max. 65 mA current consumption	
Supported communication protocols: IO-Link (4800 and 38400 bits/s) EPS protocol (19200 bits/s)	
for operation with FDT framework software "ifm Container" or software "LINERECORDER SENSOR"	

<b>Environment</b>	
Ambient temperature [°C]	-25...45

<b>Mechanical data</b>	
Weight [kg]	0.174

<b>Electrical connection</b>	
------------------------------	--

**Wiring**

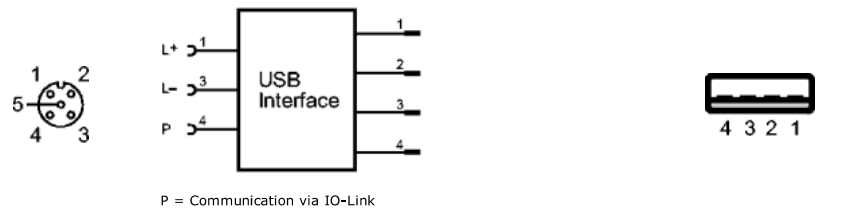

<b>Accessories</b>	
Accessories (optional)	FDT framework software "ifm Container" (order no. E30110), also available for download on the ifm website; software "LINERECORDER SENSOR" (order no. QA0001)

<b>Remarks</b>	
Pack quantity [piece]	1

<b>Other data</b>	
Interface supply	input voltage: 5 V current consumption from USB port: max. 500 mA
Sensor supply	output voltage: 24 V DC output current: ≤ 65 mA
Connection	connection cable for the sensor: 2 m USB cable: 0.4 m

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — E30396 — 23.10.2015